




F1B 50-16 AUT. LONG MAGAZINE

- Possess the same performances as the Standard Version
- Extra long magazine for less reloading
- A **world-wide patented one trigger system** enables the operator to switch from simple shot to auto fire during the operation
- Fewer components in the valve area and its design, which offers an easy and trouble-free maintenance, make the tool robust and simple
- One hand control allows the operator to set the desired speed without leaving the hold on the tool with his right hand
- Oversized metal cap and metal insert reduces vibrations and fatigue while keeping the max. speed (over 1.600 cycles per minute)

STAPLE TYPE

Duo-Fast 50, BeA 95

TOOL TYPE

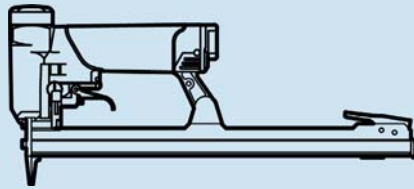

1B 50-16 AUT LM


TOOL CHARACTERISTICS

Height	Width	Length	Weight
167 mm	42 mm	376 mm	1370 g
6.57 inch	1.65 inch	14.80 inch	3.00 lbs

Pressure 5 - 7 bar | 70 - 100 psi

Air consumption per shot 0.17 l in aut.
Performances at 90 psi / 6.2 bar (0.62 MPa)

FASTENER DATA

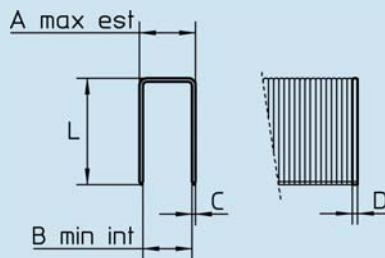

A) Outside Crown	12.50 mm	0.492 inch
B) Inside Crown	11.30 mm	0.444 inch
CxD) Wire	0.50 x 1.25 mm	0.019 x 0.049 inch
L) Length	6 - 16 mm	1/4 - 5/8 inch
Magazine Capacity	230 staples	
Staple Type	Duo-Fast 50, BeA 95	

NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$: 92.12 dB (A) - $K_{WA,1s}$, 2.5

$L_{pA,1s}$: 81.30 dB (A) - $K_{pA,1s}$, 2.5

VIBRATION VALUE

(UNI ISO/TS 8662-11)

is below the declaration limit set by UNI EN ISO 12100-1/2

ACTUATION & LOADING

Actuation System* 5
(Safety : No)

Loading* Bottom Loading

*see instruction manual

APPLICATIONS

- garden furniture
- baseboards
- upholstery
- boat interiors

WORLD-WIDE PATENTED: ONE TRIGGER SYSTEM

The new automatic design features a rapid valve controlled uniquely by the trigger itself. If the trigger is slightly depressed, the tool works in single shot system. By depressing the trigger fully, the tool switches over to the automatic firing sequence.

FASCO S.R.L. Italy

Via B. Buozzi 2

I - 40057 Cadriano di Granarolo (BO)

Tel. +39 051 / 60 181 | Fax +39 051 / 766 325

fasco@fasco-spa.com | www.fasco-tools.com

